


Druck- & Ziehkerne / Pressure & Drawing inserts



Ziehkerne / Drawing inserts		
Bezeichnung designation	Winkel angle	Durchmesser diameter
BZK4	9°	0,15 - 1,49
BZK4	12°	0,50 - 5,85
BZK4	14°	2,00 - 5,85
BZK4	16°	2,00 - 5,85
BZK6	9°	4,10 - 7,59
BZK6	12°	4,20 - 8,95
BZK6	18°	6,00 - 8,95
BZK8	12°	7,60 - 9,95
BZK8	18°	8,90 - 13,10
BZK30	10°	6,50 - 16,50
BZK30	12°	6,50 - 16,50
BZK30	18°	6,50 - 16,50
BZK30	20°	6,50 - 16,50
BZK40	12°	14,00 - 21,60
BZK40	18°	14,00 - 21,60
BZK40	20°	14,00 - 21,60

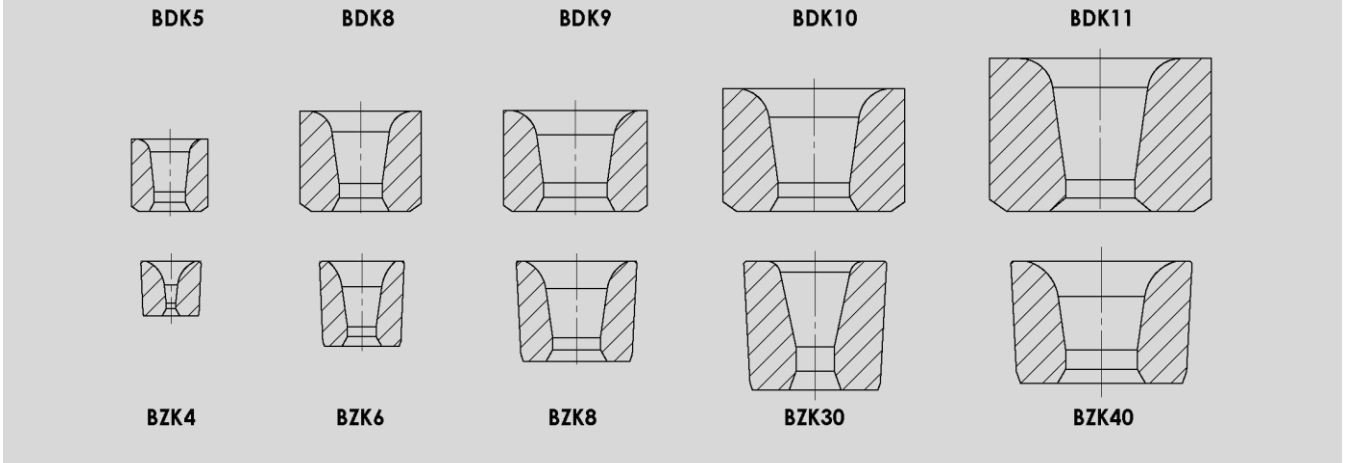

Standard Toleranzen / standard tolerances		
Durchmesser diameter	Zylinderlänge Cylinder length	Toleranz tolerance
0,20 - 0,49	20 - 50 %	+0.02 / -.002
0,50 - 0,74	25 - 50 %	+0.003 / -.003
0,75 - 2,49	30 - 50 %	+0.000 / -.010
2,50 - 5,07	30 - 50 %	+0.005 / -.010
5,08 - 7,59	20 - 40 %	+0.010 / -.010
7,60 - 12,69	20 - 35 %	+0.010 / -.010
12,70 +	20 - 30 %	+0.010 / -.010

Druckkern / Pressure inserts		
Bezeichnung Designation	Winkel angle	Durchmesser diameter
BDK5	16°	0,75 - 0,99
		1,00 - 2,49
		2,50 - 6,05
		6,06 - 7,10
BDK8	18°	7,10 - 10,95
BDK9	18°	11,00 - 15,95
BDK10	18°	16,00 - 19,85
		19,90 - 29,15
BDK11	18°	19,90 - 29,15



Standard Toleranzen / standard tolerances		
Durchmesser diameter	Zylinderlänge cylinder length	Toleranz tolerance
0,50 - 1,49	10 - 50 %	+0.010 / -.000
1,50 - 4,99	05 - 40 %	+0.020 / -.000
5,00 - 9,99	05 - 40 %	+0.030 / -.000
10,00 +	05 - 30 %	+0.050 / -.000